

# VISTA INSERT

## INSERT

FOR SMALL TO MEDIUM SPACES

Heat Output Cord Wood


# 56,000 BTU

26,300 BTU EPA Test Fuel

EFFICIENCY (LHV)	75.5%
EMISSIONS	2.9 GM/HR.
LOG SIZE (RECOMMENDED)	16 IN.
LOG SIZE (MAX)	18 IN.
FIREBOX SIZE	1.5 C.FT.
GLASS SIZE	103 SQ.IN.
WEIGHT	266 LBS.

For woodstove heating in smaller masonry or factory-built fireplaces, choose the Vista Insert. Designed to deliver efficient combustion and controlled heat, it raises the burn temperature while extending the burn time, providing more heat from less fuel. Like all Pacific Energy inserts it's easy to light, easy to use, and provides a clear view of the flame. With a variable speed fan, clean-glass airwash technology and heavy-gauge overbuilt construction, the Vista will provide many years of comfort and enjoyment.

For reference only. Installations should be based on installation manuals. Specifications subject to change.

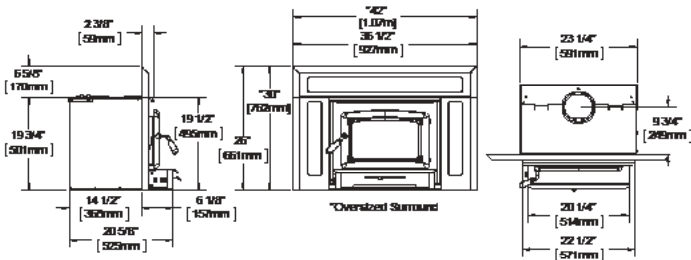

### STANDARD FEATURES

- EPA Certified
- Reliable, durable non-catalytic technology
- Single-Lever Air Control
- Air wash system for super clean ceramic glass
- Floating firebox for extended stove life
- Heavy plate-steel top under decorative top
- Steel Baffle and 304 Stainless Steel insulation cover
- Boost air for easy lighting
- 80 cfm temperature-actuated variable-speed blower

### DESIGN OPTIONS

- Arched door: choice of three finishes
- Embossed Surround, Standard Size (36.5" x 26")
- Embossed Surround, Oversize (42" x 30")



AIR WASH  
A SYSTEM BY PACIFIC ENERGY



BAFFLE SYSTEM



FLOATING FIREBOX



KNIFE EDGE DOOR



SINGLE LEVER  
AIR CONTROL